

1000 CMU AUDIO CONTROLLER



Power Supply
AC110V~220V; 50/60HZ



Model Data
1000CMU



Sensitivity
-56dB Wire Microphone

Technical Specifications


Microphone Controller

- 256 Microphones can work in a single room.
 - Audio controller support 64units-Chairman & Delegate.
 - To connect more than 64 Microphones, an Extension Power Unit is required.
 - It supports discussion mode, work mode,
 - Free mode, Limit 1/2/3/5
 - Port for Telephone interface input-
 - Telephone meeting is compatible.
- Connection:
- a. 1 pc 13m main cable with 8PIN plugs;
 - b. 8 PIN socket for system connection

The Audio Controller main unit consists of:

- Power switch
- Power LED
- Mode: Limit 1/2/3/5, Free
- TREBLE
- MEDIAN
- BASS
- System volume (MASTER)
- System Line 1, 2, 3, EXT
- LINE OUT
- MIX OUT
- TEL IN/OUT
- Data port for connection video processor
- Power AC 220V/50Hz

AVAILABLE THROUGH PAN INDIA DISTRIBUTOR & DEALER NETWORK

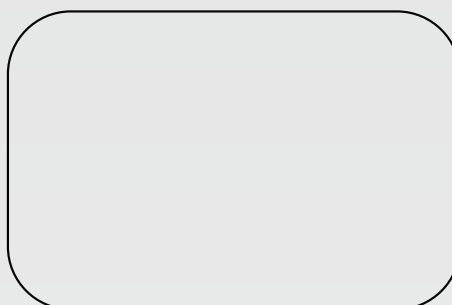

www.atdscindia.com


Technical Specifications

Model Data	1000CMU
Power Supply	AC110V~220V; 50/ 60Hz
Power Consumption	115W
T.H.D.	〈0.05%
Dimension	480X340X45mm
Sensitivity	-56dB Wire microphone
Frequency response	40Hz——16KHz
Net Weight	5Kg
Color	Black
Installation	19-inch frame

Extension Power supply unit consists of

- Power on/off
- Power indicator
- EXPAND INPUT (IN: To the previous main unit or extension power supply,
- EXT: to the next extension power unit)
- EXPAND OUTPUT: Six output lines for connecting a microphone, and each line with power control.
- Power AC 220V/50Hz.

AVAILABLE THROUGH PAN INDIA DISTRIBUTOR & DEALER NETWORK

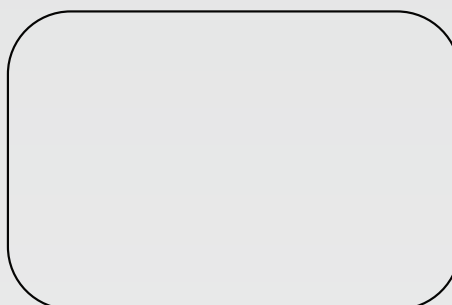

www.atdscindia.com