

PA 350 & 500 AMPLIFIER



Power Supply
AC: 220-240V 50/60Hz



Signal to Noise Ratio
60dB




Speaker Output
4 ohms, 8 ohms & 100V

Technical Specifications

| Model | ATDSC PA 350 | ATDSC PA 500 |
|---------------------------------|--|---|
| Power Output | 410W Max., 350W RMS at 10% THD, 350W RMS at 5% THD | 550W Max., 450W RMS at 10% THD, 440W RMS at 5% THD |
| Output Regulation | 2dB, no load to full load at 1kHz | 2 dB, no load to full load at 1 kHz |
| Input Channels | 7 X Mic 0.65m V/4.7k ohms 2 X Aux 100m V/470k ohms | 5 X Mic 0.65m V/4.7k ohms 2 X Aux 100m V/470k ohms |
| Frequency Response | 50-15,000Hz \pm 13dB, | 50-15,000Hz \pm 3dB |
| Signal to Noise Ratio | 60dB | 60dB |
| Tone Controls | Bass \pm 10dB at 100Hz, Treble \pm 10dB at 10KHz | Bass \pm 10dB at 100Hz, Treble \pm 10dB at 10KHz |
| Outputs | Line: 200mV/600 ohms, 1V/1k ohms | Line: 200m V/600 ohms, 1V/1k ohms |
| Speaker Output | 4 ohms, 8 ohms & 100V | 4 ohms, 8 ohms & 100V |
| Digital Player | Mp3 Player with USB, SD Card & Bluetooth | Mp3 Player with USB, SD Card & Bluetooth |
| Power Supply | AC: 220-240V 50/60Hz, DC: 12V Power Consumption: AC: 250VA DC :4A | AC: 220-240V 50/60Hz, DC: 12V Power Consumption: AC: 250VA DC :4A |
| Power Consumption Consist of | AC: 250VADC 4A USB Pen drive Port SD Card Plug and Play Compatible with Radio & Bluetooth, EQ & Recording 5 Channels Microphone Inputs 2 Channels Aux Inputs 1 Channel Line Output 100V Constant Voltage Output and 4 Ω 8 Ω 16 Ω Resistance Output. | AC: 250VADC 4A USB Pen drive Port SD Card Plug and Play Compatible with Radio & Bluetooth EQ & Recording 5 Channels Microphone Inputs 2 Channels Aux Inputs 1 Channel Line Output 100V Constant Voltage Output and 4 Ω 8 Ω 16 Ω Resistance Output. |

AVAILABLE THROUGH PAN INDIA DISTRIBUTOR & DEALER NETWORK

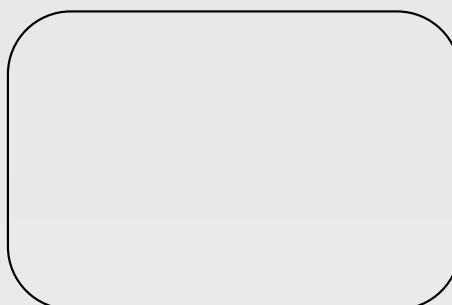

www.atdscindia.com