

FLUSH MOUNT


DIGITAL CONFERENCE SYSTEM WITH CAMERA TRACKING



Sensitivity
-46 dBV/Pa



Frequency response
20Hz~20KHz




Input impedance
2 k Ω

The Latest Flush Mount Digital Audio Conference System with Look at Me (Speaker Tracking), TFT Display, Built-in Speaker comes with seamless connection and Intelligent Central Control System plus Video Conference System providing a complete solution for efficient Modern Conference System.

FEATURES

- Material: Metal panel design with high-grade and solemn, modern aesthetic standards.
- Dual back up connection both with 8-core cable and network cable.
- T-type 8-core connection wire shielded by full-line aluminium foil, reduces the interference of strong electromagnetic waves.
- Daisy Chain (Loop I –Loop Out) on Cat-6 network cables with two RJ45 interfaces.
- Professional high-fidelity capacitor microphone, sensitive pickup, clear voice, bandwidth up to 20Hz ~ 20KHz
- Anti-interference circuit design to prevent interference from mobile phones.
- Twin-color ring light in Microphone. Red when on & active. Green in request mode. Ring light color can be switched as per user preference.
- Dual bend microphone stem gives more flexibility to adjust angle as per individual convenience.
- 2.4-inch high-brightness IPS TFT display. Display the unit parameters, date and time, volume, monitoring volume etc.
- Speaking Time limit can be set for Delegate Units / participants.
- Built-in speaker & a headphone output port along with volume adjustment button to select the output mode and adjust volume.
- Chairman unit comes with priority button to mute delegate unit & Request Approve button to approve request to speak from delegate units giving complete control and to run the conference in order.
- Chairman unit can be multiple in numbers, can be at any position.
- The connection position of the chairman unit is not restricted.

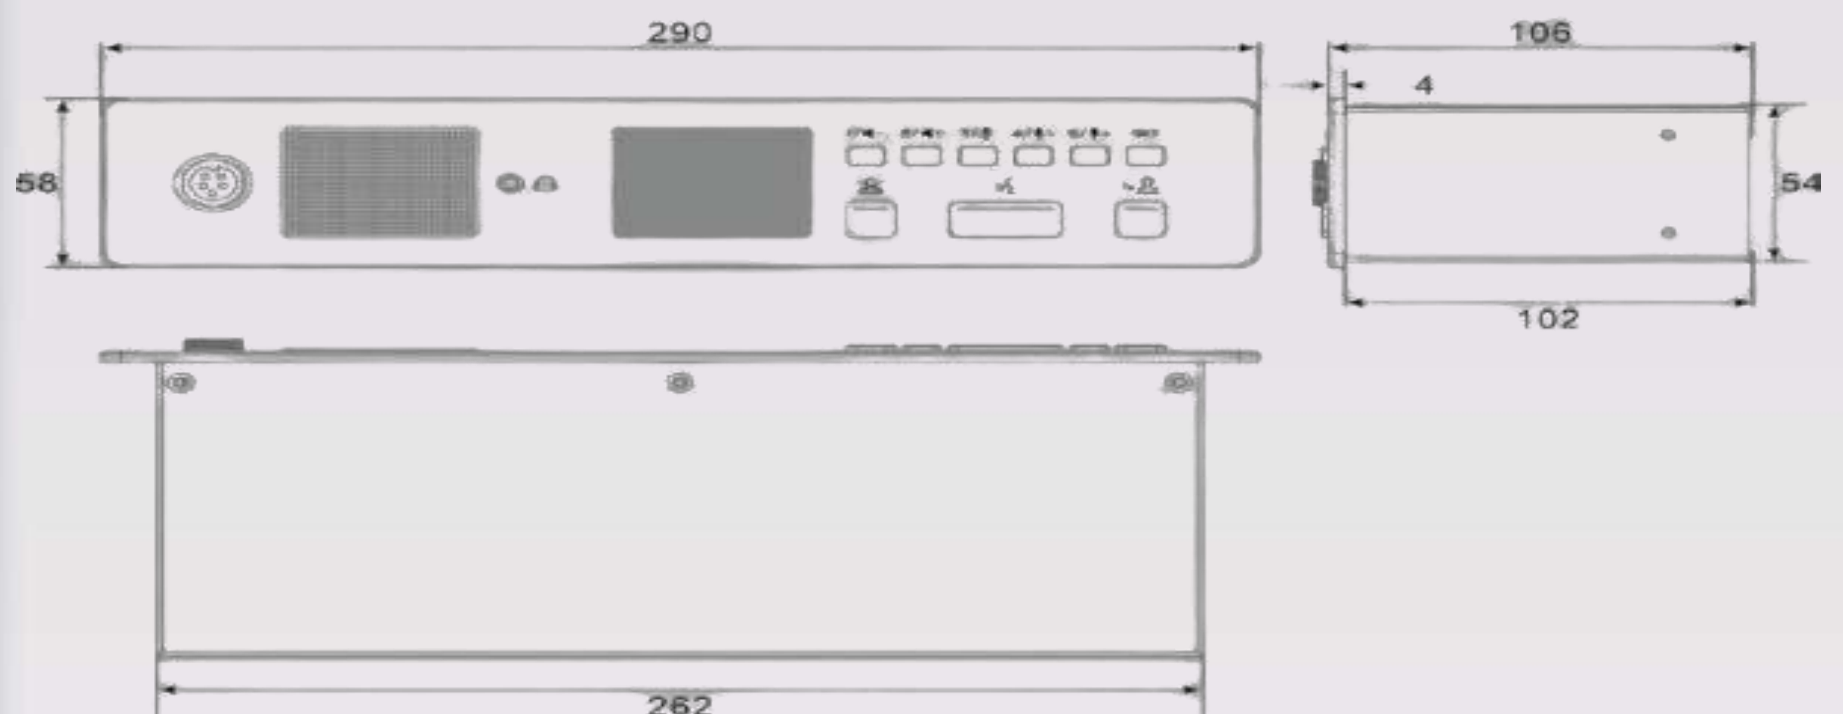

Technical Specifications

	Chairman Unit	Delegate Unit
Model No.	CFM110-C	CFM110-D
Priority Button	1	-
Request Approval Button	1	-
Multi-Function Buttons		
• Speaker & Earphone Volume Up	1	
• Speaker Earphone Volume Down	1	
• Mic Volume Up	1	
• Mic Volume Down	1	
• Mic. Mute	1	
• Set Button	1	
Working Voltage	DC24V	
Interface	DIN-8P & Twin CAT6 Ports (For Loop In Loop Out)	
Capsule	Cardioid	
Sensitivity	-46 dBV/Pa	
Frequency response	20Hz~20KHz	
Input impedance	2 k Ω	
Directional 0°/180°	> 20 dB (1 kHz)	
Equivalent noise	20 dBA (SPL)	
SPL	125 dB (THD<3%)	
S/N ratio	>80dB	
Cross talk	>80dB	
T.H.D	<0.05%	
Display	2.4 IPS TFT	
Built-in speaker	8 Ω 5W	
Earphone load	>10 Ω	
Earphone volume	10 W	
Earphone jack	3.5mm \times 1	
Dimensions	Base : (L x 290mm W x 58mm H x107mm) Microphone length : 421mm	
Weight	Base: 0.92Kg, Mic: 0.07Kg	
Colour	Black	
Installation	Embedded style	

AVAILABLE THROUGH PAN INDIA DISTRIBUTOR & DEALER NETWORK



www.atdscindia.com