


# WIRED AUDIO CONFERENCE SYSTEM



Atdsc

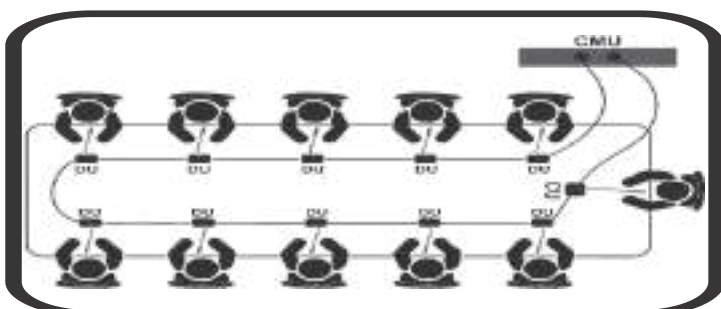

## Technical Specifications

- Frequency response: 40Hz-16KHz.
- Sensitivity: -44db±2db.
- Reference sound receiving distance: 20-120cm.
- Embedded installation and detachable microphone system.
- Power supply for all the microphones is provided by the main unit.
- 8-PIN T-type hand-in-hand loop in loop out cable.
- LED- Red indicator lamps shows the status of the microphone.
- Talk Button with Dual Color LED Light. Green Color -On & Red Color Talk.
- Chairman unit number is unrestricted, can join in any position in the conference.
- Indicative sound for chairman unit(optional).

TECHNICAL SPECIFICATION		
Model	Chairman Unit- ATDSC CU100 Delegate Unit- ATDSC DU100	
	Chairman Unit	Delegate Unit
Microphone		
Priority Button	Yes	No
Button On/Off	Yes	Yes
Ring Light	Red (When on)	Red (When on)
Sensitivity	-44dB + 2dB	-44dB + 2dB
Frequency Response	100Hz-16kHz	100Hz-16kHz
Detachable Microphone	4 Pin	4 Pin
T.H.D.	<0.05%	<0.05%
Power Consumption	1W	1W
Voltage	DC18V (Supply by 8 PIN cable)	DC18V (Supply by 8 PIN cable)
Dimension	Base:120x85x25mm Mic. 420mm (Length)	Base:120x85x25mm Mic. 420mm (Length)
Color	Black	Black
Installation	Tabletop	Tabletop
Net Weight	0.7kg	0.7kg

**Authorized Dealers:**