

AN8020NDI SERIES HD VIDEO CONFERENCE CAMERA



AN8020NDI SERIES HD VIDEO CONFERENCE CAMERA


Full HD, Wide View Angle, Multiple Video Interfaces. Multiple protocols.

AN8020NDI series camera offers perfect functions, superior performance and rich interfaces. The features include advanced ISP processing algorithms to provide vivid images with a strong sense of depth, high resolution, and fantastic color rendition. It supports H.264/H.265 encoding which makes motion video fluent and clear even under less than ideal bandwidth conditions.

Technical Specifications

View Angle	3.3° (Tele)-54. 7°(Wide)	Iris/Electronic Shutter	Auto/Manual
Iris	F1.6-F3.5R=5.57~110mm	Focus	Auto/Manual/One Push
Sensor	1/2.8 inch high quality HD CMOS sensor	BLC	ON/OFF
Effective Pixels	2.07MP,16: 9	WDR	OFF/ Dynamic level adjustment
Optical Zoom	20X	Video Adjustment	Brightness, Color, Saturation, Contrast,Sharpness, B/W mode, Gamma curve
Digital Zoom	10X	SNR	>55dB
DNR	2D&3D DNR	Minimum Illumination	0.5Lux (F1 .8, AGC ON)
White Balance	Auto / Manual/ One Push/ 3000K/3500K/4000K/4500K/ 5000K/5500K/6000K/6500K		
Video Interfaces	USB3.0, DVI, NDI	Video Format	HDMI/HD Base video format; 1080P60/150/30/25/59.94/29.97, 1080/160/50/59.94, 720P60/50/130/25/59.94/29.97
Ports	LAN, RS232(IN)	US83.0 Interface video format:	1) USB3.0: 1920X1080P60/50/30/25 , 1280X720P30/25/115/110, 960X540P30, 640X360P30,800X600P30, 2) USB3.0compatlble with USB2.0: 960X540P30, 640X360P30. 1280X720P10/15, 720X576P30, 720X480P30,800X600P30
Video Compression Format	H.2 64, H.265, Dual stream output	USB2.0 interface video format:	176x144/320x240/320x180/ 352x288/640x480/720x480/720x576/640x360/800X600/ 960X540/1024X576/1024X768/1280X 720/ 1920X1080P30/25/20115/10/5
Control Protocol	VISCA/Pelco-D/Pelco-P, Baud Rate: 11520/9600/ 4800/2400	Power Adapter	AC110V-AC220V to DC12V/1.5A
LAN Port	100M IP port(1 00BASE-TX), 5G Wifi (Optional) Support VISCA protocol control through IP port.	Dimension	258mmX172mmX168mm
Network Protocol	RTSP/RTMP, ONVIF, NDI GB/T28181	Weight	1.54KG
Power Interface	HEC3800 outlet (DC12V)	Remote Operation (IP)	Remote Upgrade. Reboot and Reset
Pan/Tilt Rotation	±170°, -30°~ +90°		
Pan Control Speed	0. 1~100°/sec		
Tilt Control Speed	0.1 ~45°/sec		
Preset Speed	Pan: 100°/sec, Tilt 45°/sec		
Preset Number	255 presets (10 presets by remote control)		

Dimension(mm):

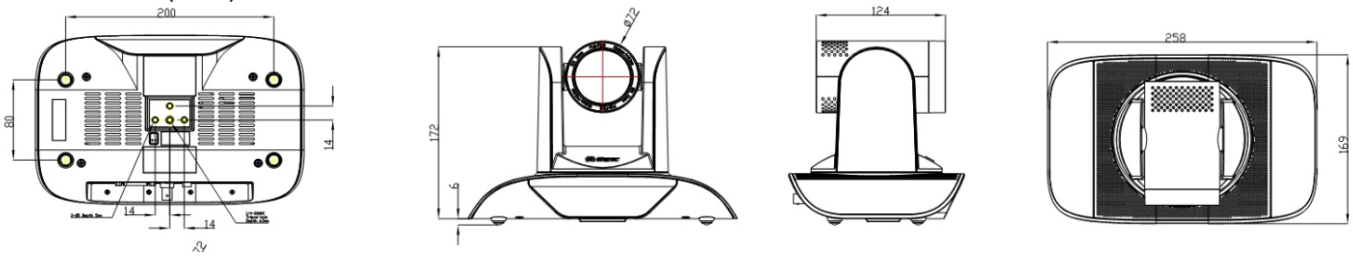

Authorized Dealers: